



4 - 8 m Mounting
Height

8 - 80W
1000 - 10000 Lm

12 Year Warranty

Birkdale Mini

Heritage Series






Mini Birkdale Heritage Lanterns offer the latest energy saving LED technology whilst maintaining the design style of a traditional fixture. The mini is one of three sizes available in the product family and provides a heritage solution suited to lower mounting heights and restricted spaces. Manufactured from the highest quality materials all sourced in Britain.

Features

- Modular optic designs offer multiple lighting solutions
- ENEC approved
- Fully programmable driver to operate with any central management system.
- 2700k - 4000k colour temperature options
- Polyester Powder coated and 1000 hour salt spray tested to survive the harshest of environments

Benefits

- Save up to 75% on traditional HID installations
- Lumen packages and optics to P2-P5 lighting classes
- Customisable gear platform Vandal resistant
- High performance powder coat finish
- UK designed and manufactured for prompt delivery

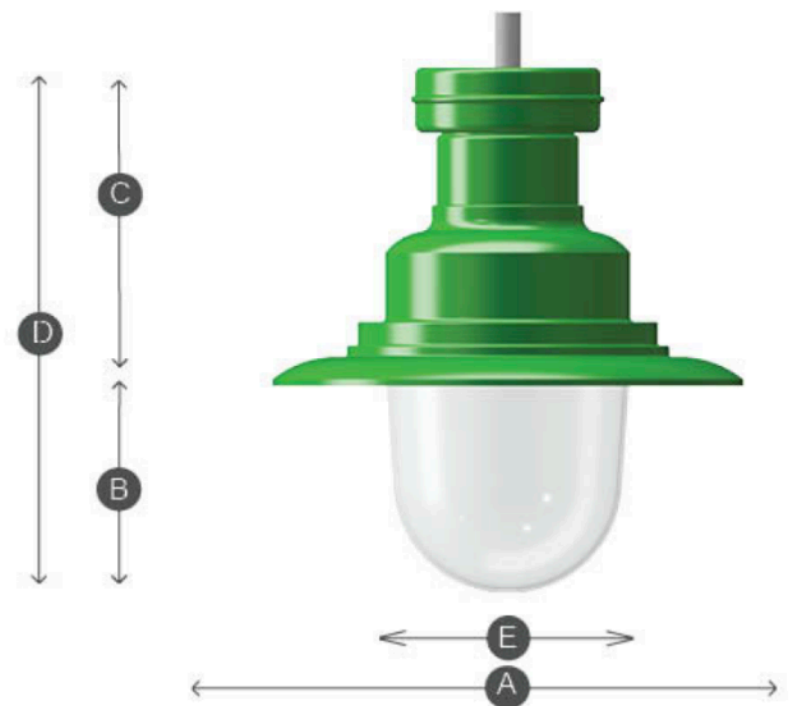

A	431 mm
B	190 mm
C	292 mm
D	482 mm
E	222 mm Bowl Diameter
Weight	7 Kg Aprox

Birkdale Mini

Heritage Series



Detailed Specification

PRODUCT SPECIFICATION

Electrical Class : Class 1

IP Rating : Optic Bowl: IP66

Gear Compartment: IP65

IK rating: IK10++

Certifications: ENEC Approved (ENEC22) to EN605981-2015 and EN60598-2-3:2003 + A1:2011

POWER AND CONTROL

Nominal Voltage: 230V - 50Hz

Drive Current Range: Up to 850mA depending on desired lumen output.

Surge Protection: 10kV Standard

Driver: Stand alone and remote dimming protocols (DALI)

LIGHTING

Light Source: LED

LED QTY: Modules configured with 12 or 24 LEDs

Configuration: Multiple modules can be used to achieve required output.

Distribution: Achieved through the use of overlay lenses mounted directly over LED array.

CCT: 2700K, 3000K, 4000k or 5000K

L90: 100,000 Hours (at 25 deg C Tq)

MECHANICAL AND INSTALLATION

Tilt / Inclination: 0 Degrees

Body: Spun Aluminium polyester powder coated


Optic Bowl: UV stabilised Vac formed bowl.

Finish: Polyester powder coated any RAL colour.

Operating Temp: -20 degs C to +50 degs C

Mounting: Suspended vertically from M24 stainless steel (Grade 316) spigot.

Photometry

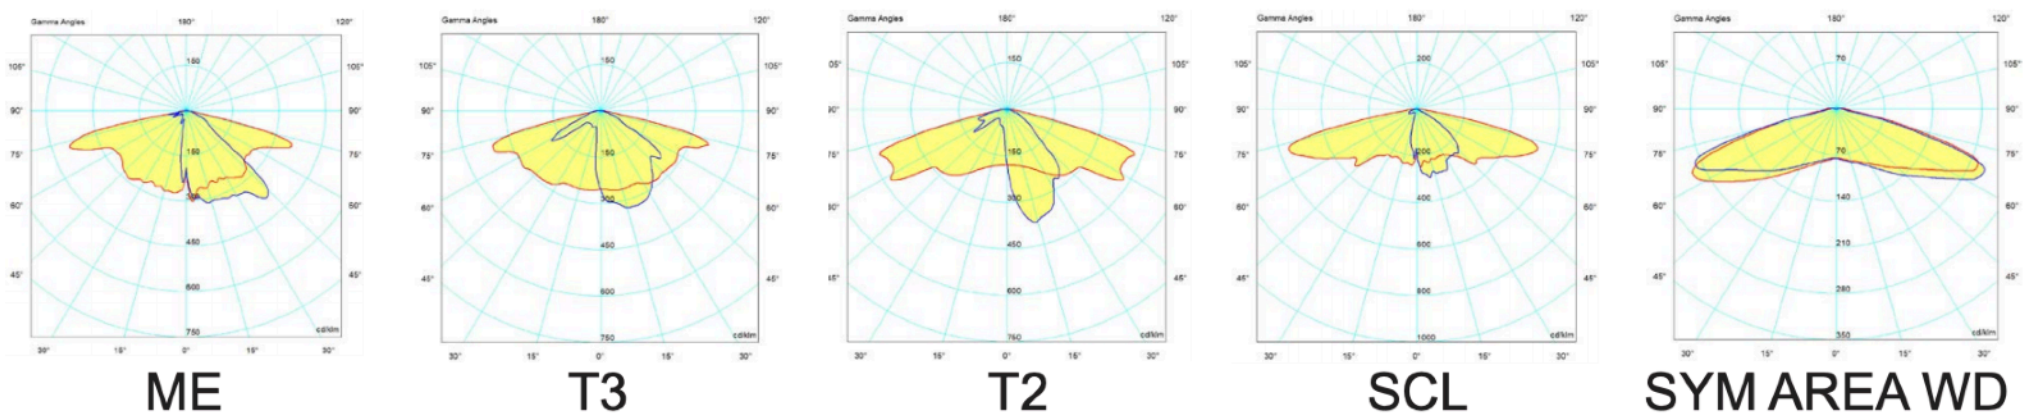

Birkdale Mini

Heritage Series

